

# TROWELABLE FLOORS

OPTIMUM LOAD BEARING PROPERTIES FOR USE IN INDUSTRIAL APPLICATIONS AND HIGH TRAFFIC AREAS | USED WHERE SUBSTRATE IS NOT LEVELED | CAN PROVIDE A GOOD CHEMICAL RESISTANCE


## BENEFITS

- Optimum load bearing properties for use in industrial applications and high traffic areas
- Good chemical resistance
- Good appearance for attractiveness
- Paint or topcoat can be applied to improve chemical resistance per required performance

## KEY REQUIREMENTS

- Low viscosity binder to achieve high filler loading
- Low carbamation for good adhesion

\* Cost efficient curing agent with low viscosity and moderate pot life.

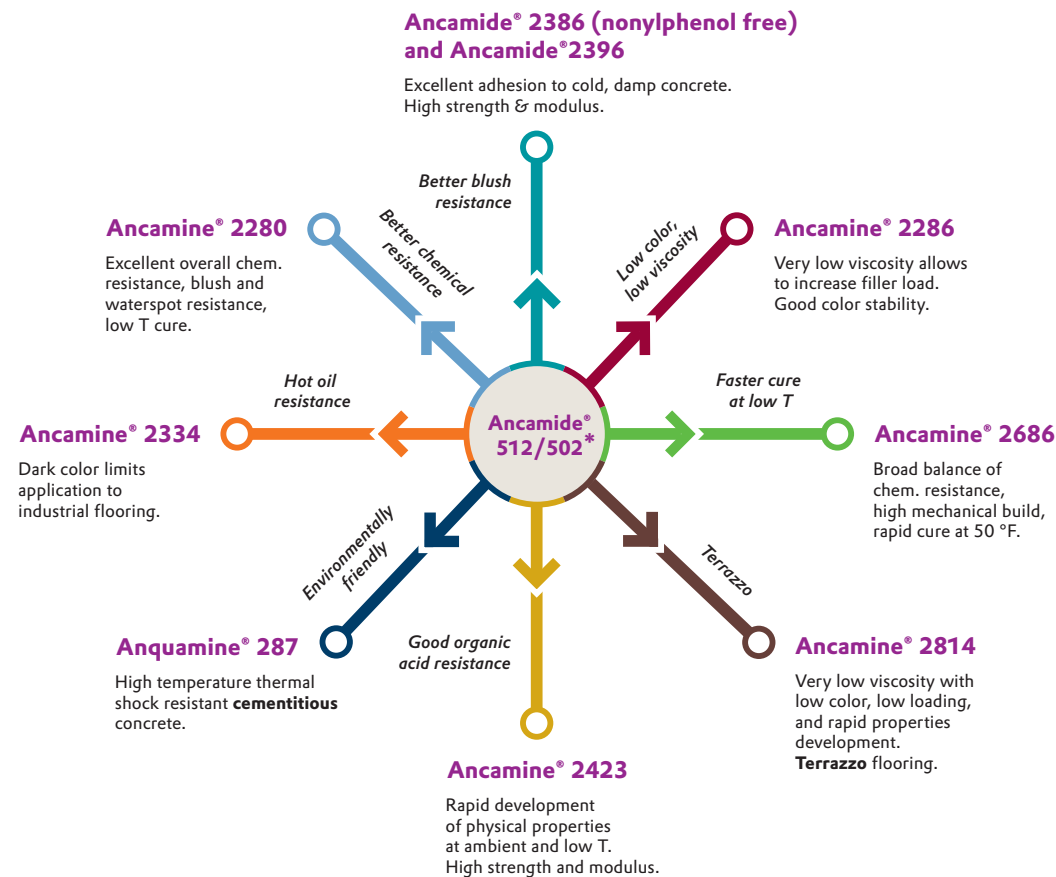

**EVONIK CORPORATION**  
7201 Hamilton Blvd.  
Allentown, PA 18195  
Phone: +1 800 345-3148  
Outside U.S. and Canada:  
+1 610 481-6799

**For technical information and support**  
Americas: [picus@evonik.com](mailto:picus@evonik.com)

**Disclaimer**  
The information contained herein is offered without charge for use by technically qualified personnel at their discretion and risk. All statements, technical information and recommendations contained herein are based on tests and data which we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and no warranty of any kind is made with respect thereto.