

Technical Information

VESTANAT® EP-MF 205

THE MOST VERSATILE SILANE BASED CROSSLINKER FOR DEMANDING COATING APPLICATIONS

VESTANAT® EP-MF 205 has the most balanced property profile of the entire EP-MF product range. Harmoniously tuned mechanical properties are paired with unprecedented flexibility. Siloxane coatings with a hardness and simultaneously high flexibility are realizable.

VALUE PROPOSITION & KEY BENEFITS


- High hardness and flexibility at the same time
- Excellent chemical/stain-resistances, antigraffiti abilities
- Touch dry within approx. 90 minutes
- Improved adhesion vs. other MF Types
- Optimal balance between performance and price

FORM & USAGE

VESTANAT® EP-MF 205 is dissolved in xylene. It is a transparent liquid with low viscosity, used as a single binder, in combination with appropriate co-binders (e.g. acrylic resins) or in combination with other EP-MF/ EP-M grades.

CHARACTERISTICS

	Value	Unit	Test Method
Silicon content	approx. 5,6	% by wt.	calculated
Viscosity at 23°C	600-800	mPas	DIN EN ISO 3219
Color (Hazen)	≤ 100	mg Pt/l	DIN EN ISO 6271
Non-volatile constituent	82	% by wt.	calculated

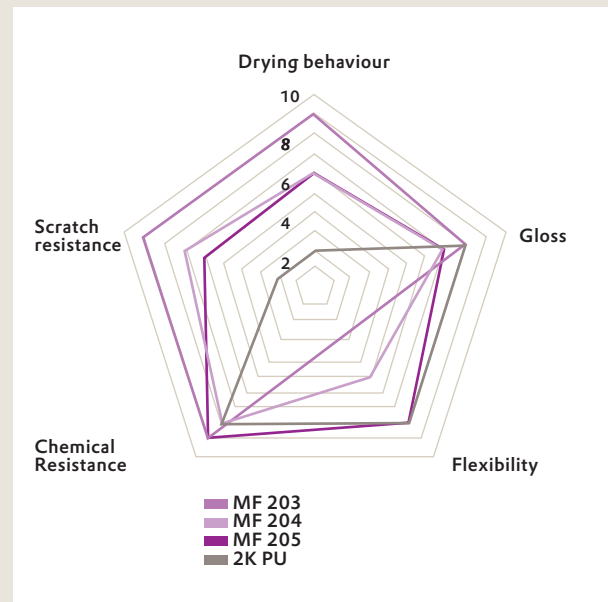

Technical Information

VESTANAT® EP-MF 205

APPLICATION

Scratch resistant, ambient curing coatings for wood, plastic and maintenance applications demanding high technical characteristics.

INVENTORY STATUS

REACH: listed TSCA: pending DSL: pending
IECSC: pending



DISCOVER MORE!

Further useful documents and information are available. Our local sales representatives look forward to serving you.

VESTANAT® is a registered trademark of Evonik Industries AG or one of its subsidiaries.
This information and all further technical advice are based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

EVONIK Resource Efficiency GmbH | Crosslinkers
Paul-Baumann-Straße 1 | 45764 Marl, Germany

Phone +49 2365 49-02
vesta@evonik.com | www.evonik.com/crosslinkers

EVONIK CORPORATION | Resource Efficiency
299 Jefferson Road | Parsippany, NJ 07054, USA

Phone +1 973 929-8462
vesta@evonik.com | www.evonik.com/crosslinkers