

Technical Information

VESTANAT® EP-MF 203 and VESTANAT® EP-MF 204

THE NEXT GENERATION IN CROSSLINKER AND BINDER TECHNOLOGY FOR HIGH PERFORMANCE, POLYURETHANE COATINGS

VESTANAT® EP-MF 203 and VESTANAT® EP-MF 204 are the next generation of polyfunctional methoxysilanes containing zero solvents and are for use in highly scratch resistant NISO coatings*.

VALUE PROPOSITION & KEY BENEFITS COMPARED TO VESTANAT® EP-MF 201 AND EP-MF 202

Processing

- Drying/curing time up to 10% faster
- Appearance and DOI** improved
- Tensile strength up to 20% higher
- Lower formulation viscosities
- Improved anti-scratch characteristics


FORM & USAGE

Transparent, low viscosity and easy-to-handle liquids used as a hardener, moisture-curable binder, or in combination with appropriate co-binders (e.g. acrylic resins).


CHARACTERISTICS

VESTANAT®	Viscosity at 23°C	Active Ingredient	Tensile strength of the cured film DFT 1 mils
High resistance grades			
EP-MF 201	ca. 250 mPas	100%	up to 15 mPa
New EP-MF 203	ca. 200 mPas	100%	up to 20 mPa
Flexible grades			
EP-MF 202	ca. 2500 mPas	100%	up to 45 mPa
New EP-MF 204	ca. 2000 mPas	100%	up to 55 mPa

VESTANAT® EP MF-201 VS. EP MF-203

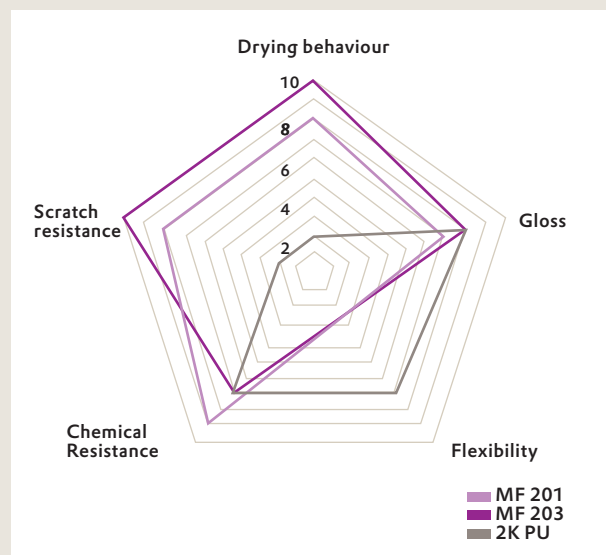

VESTANAT® EP MF-202 VS. EP MF-204

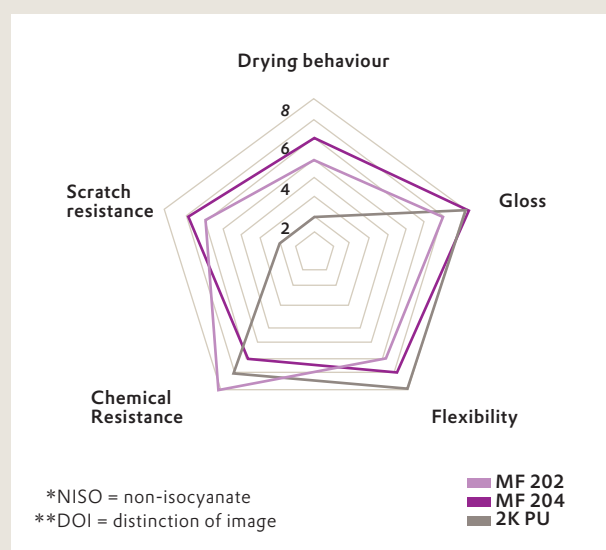

*NISO = non-isocyanate
**DOI = distinction of image

Technical Information


VESTANAT® EP-MF 203 and VESTANAT® EP-MF 204

APPLICATION

Scratch resistant, ambient curing coatings for wood, plastic and maintenance applications demanding the highest performance characteristics.

INVENTORY STATUS

TSCA: pending DSL: pending REACH: listed

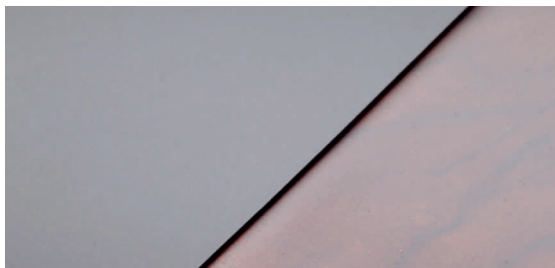

VESTANAT® EP-MF
grade based clearcoat



Standard 2K PUR
clearcoat

DISCOVER MORE!

Further useful documents and information are available. Our local sales representatives look forward to serving you.

VESTANAT® is a registered trademark of Evonik Industries AG or one of its subsidiaries.

This information and all further technical advice are based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

EVONIK Resource Efficiency GmbH | Crosslinkers
Paul-Baumann-Straße 1 | 45764 Marl, Germany

Phone +49 2365 49-02
vesta@evonik.com | www.evonik.com/crosslinkers

EVONIK CORPORATION | Resource Efficiency
299 Jefferson Road | Parsippany, NJ 07054, USA

Phone +1 973 929-8462
vesta@evonik.com | www.evonik.com/crosslinkers