


Epoxy Curing Agents for Bolt Anchoring

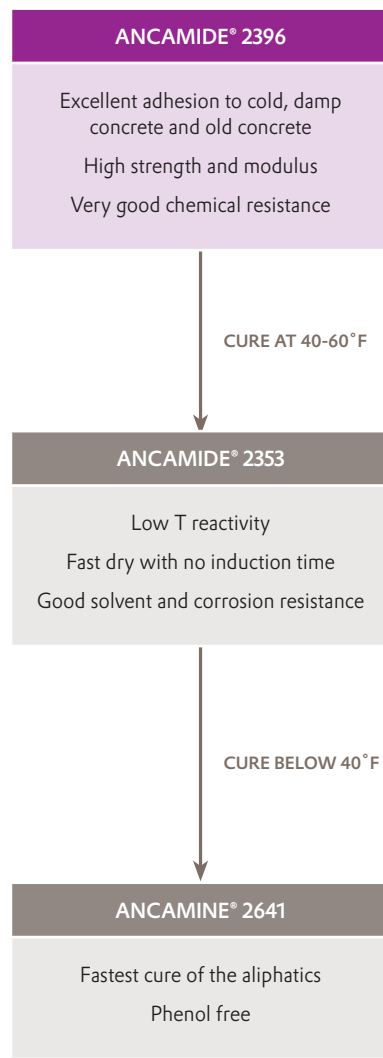

BOLT ANCHORING

Benefits

- Good mechanical properties
- High chemical and stress resistance

Key Requirements

- Non-sagging
- Cure to load bearing in 6 to 8 hours
- Creep Resistance
- Low Temp Cure <40°F
- Adhesion to cold, damp concrete
- Adhesion to water-filled hole
- Adherence to new ICC-ES (International Code Council-Evaluation Service) Standards AC308 and ASTM E-1512

EVONIK CORPORATION

7201 Hamilton Blvd.
Allentown, PA 18195
1 800 345-3148
Outside U.S. and Canada 1 610 481-6799



Technical/product information:

CrosslinkersProdInfo@evonik.com

Product samples:

Crosslinkers-samples@evonik.com

Disclaimer

The information contained herein is offered without charge for use by technically qualified personnel at their discretion and risk. All statements, technical information and recommendations contained herein are based on tests and data which we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and no warranty of any kind is made with respect thereto.