


Flexible Systems for Deck Overlays and Membranes

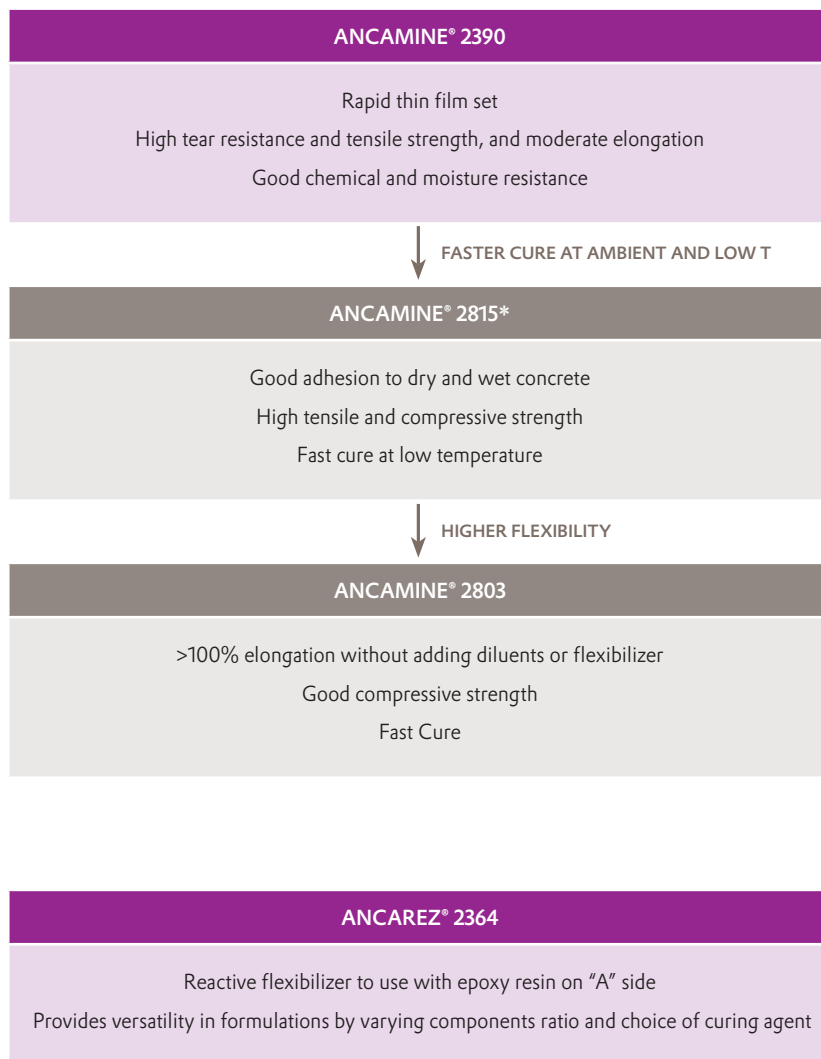

FLEXIBLE SYSTEMS FOR DECK OVERLAYS, MEMBRANES, AND OTHER APPLICATIONS

Benefits:

- High mechanical properties
- Low moisture sensitivity
- High wear resistance to heavy traffic

Key Requirements

- Strong adhesion to concrete
- Fast cure
- Low viscosity
- Moderate to high elongation (typically <100% for overlays; >100% for membranes)
- Low modulus
- Abrasion resistance
- Adherence to ASTM standards could be required

EVONIK CORPORATION

7201 Hamilton Blvd.
Allentown, PA 18195
1 800 345-3148
Outside U.S. and Canada 1 610 481-6799



Technical/product information:

CrosslinkersProdInfo@evonik.com

Product samples:

Crosslinkers-samples@evonik.com

Disclaimer

The information contained herein is offered without charge for use by technically qualified personnel at their discretion and risk. All statements, technical information and recommendations contained herein are based on tests and data which we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and no warranty of any kind is made with respect thereto.

* Ancamine 2815 is a prototype.

These recommendations are intended as basic guidelines, and should be viewed as such, due to variability of customer specific requirements and application conditions.