


## VESTAMIN® TMD

2,2,4-Trimethyl hexamethylene diamine

2,4,4-Trimethyl hexamethylene diamine

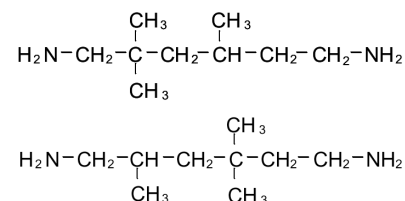

43.13.008ew / 05.07

### General description

VESTAMIN TMD is a branched aliphatic diamine. It is a colorless liquid with approximately equal parts of the 2,2,4- and 2,4,4-trimethyl hexamethylene diamine isomers.

### Specification

Property	Value	Unit	Test method*
Color (APHA)	max.15	-	DIN ISO 6271, ASTM D1209
Appearance	clear liquid	-	visual
Water content	max. 0.2	% by wt.	Karl Fischer **
Purity	at least 99.4	% by wt.	gas chromatography
Aminonitrile	< 0.15	% by wt.	gas chromatography
Secondary- and tertiary amino compounds	< 0.15	% by wt.	gas chromatography
Saturated primary cyclic diamines	max. 0.3	% by wt.	gas chromatography

\*

\*\*

DIN, ISO or ASTM methods describe our analytical procedures in general. The actual methods used internally are more precise and can be obtained upon request.

Modified by using a solution of 30% salicylic acid in methanol under cooling.

### Properties

VESTAMIN TMD is a low viscosity liquid miscible in water in all proportions at ambient temperatures. It is strongly alkaline with a pH value of 11.6 for a 0.1 N solution. VESTAMIN TMD is soluble in a wide range of polar organic solvents including esters and alcohols. VESTAMIN TMD undergoes chemical reactions typical of aliphatic amines, i.e., with phosgene, aldehydes, epoxy resins, organic acids, ketones, etc. The reactivity of the individual isomers does not vary significantly.

### Application

VESTAMIN TMD shows behavior similar to hexamethylene diamine, but it has unique properties which enable it to be used in many special applications. Typical applications include the production of hardeners for epoxy resin systems and the synthesis of polyamides and polyurethanes. It is also the starting point for synthesis in the field of anti-corrosives, emulsifiers, vulcanization accelerators, pesticides, textile auxiliaries, flotation media, lubrication oil additives, etc.

## Epoxy hardener

Compared to other short chain aliphatic diamines, VESTAMIN TMD has a longer pot life, without slowing the final cure. Products cured with VESTAMIN TMD are clear and non-yellowing with good flexibility and chemical resistance. It can be used for all types of epoxy resin applications, such as casting resins for electrical use, solvent free and solvent containing lacquers and coatings.

### General physical data

Property	Value	Unit	Test method
Molecular weight $C_9H_{22}N_2$	158.3	g/mol	
Equivalent weight	79.2	g/val	
H-active-equivalent weight	39.6	g/val	
Density at 20 °C	0.865-0.870	g/cm <sup>3</sup>	DIN 51 757, ASTM D 2111
Boiling point at 1013 hPa	232	°C	DIN 53 171
Vapor pressure at 50 °C	< 1	hPa	
Viscosity at 23 °C	6	mm <sup>2</sup> /s	DIN 51 562
Viscosity at 20 °C	approx. 6	mPas	DIN EN ISO 3219 (Brookfield)
Melting point	- 80	°C	ISO 1392
Flash point	110	°C	DIN EN 22 719

### Transport and Packaging

VESTAMIN TMD is supplied in 20 kg non-returnable cans and 180 kg non-returnable drums respectively and in bulk. As a result of the existing exceptional approval to the appendix C/GGVE and GGVS we can also deliver this product to European users in rail tank wagons and road tankers provided, however, that such transport is covered by special bilateral agreement concerning appendix I/RID (CIM) or ADR.

For NAFTA: VESTAMIN TMD is supplied in 44 pound non-returnable cans and 397 pound non-returnable drums.

### Storage

VESTAMIN TMD is slightly hygroscopic and tends to form carbamates by reaction with atmospheric CO<sub>2</sub>. It should be stored free from moisture and carbon dioxide in glass, stainless steel and similar containers. Carbon steel is adequate under normal circumstances but the use of aluminum should be avoided. VESTAMIN TMD is stable for at least one year when stored in original containers at temperatures below 25 °C.

### Safety and Handling

For information on toxicity and handling, consult our Material Safety Data Sheet for this product.

### Special Note

Further information about handling VESTAMIN TMD can be taken from our brochure "VESTAMIN IPD / TMD and V214 - Properties and Handling" (brochure no. 43.01.065ew).

---

<b>Evonik Resource Efficiency GmbH</b>	<b>Evonik Corporation</b>	<b>Evonik Speciality Chemicals Co., Ltd.</b>
Paul-Baumann-Str. 1	Reource Efficiency	55, Chundong Road
45764 Marl	299 Jefferson Road	Xinzhuang Industry Park
Germany	Parsippany, NJ 07054-0677, USA	Shanghai, 201108, PR China
PHONE +49 2365 49-02	PHONE +1 973 929-8000	PHONE +86 21 6119-1000
FAX +49 2365 49-5030	FAX +1 973 929-8460	FAX +86 21 6119-1168
<a href="http://www.evonik.com/crosslinkers">www.evonik.com/crosslinkers</a>	<a href="http://www.evonik.com/crosslinkers">www.evonik.com/crosslinkers</a>	<a href="http://www.evonik.cn/crosslinkers">www.evonik.cn/crosslinkers</a>
<a href="http://www.evonik.com/coatings">www.evonik.com/coatings</a>	<a href="http://www.evonik.com/coatings">www.evonik.com/coatings</a>	<a href="http://www.evonik.com/coatings">www.evonik.com/coatings</a>
E-MAIL <a href="mailto:vesta@evonik.com">vesta@evonik.com</a>	E-MAIL <a href="mailto:vesta@evonik.com">vesta@evonik.com</a>	E-MAIL <a href="mailto:vesta@evonik.com">vesta@evonik.com</a>

Replaces leaflet 4313.008e / 05.02 and all former issues  
Marl, May 23, 2007

VESTAMIN® is a registered trademark of Evonik Industries AG or one of its subsidiaries

This information and all further technical advice are based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used